

AUGMENTED VISION

DESCRIPTION

Linear-shaped decorative system
 Extruded aluminium profile
 3P/5P push-in terminal block
 I-channel constant current SELV LED Driver
 LEDT5 lamp 1x1500 mm




ITEMS	DESCRIPTION	COMMENT
Colour	RAL 9010	White
Optical System	High efficiency Matt reflector & double parabolic louvers Opal Diffuser	
Electronic Control Gear	Electronic constant current LED Driver Fixed output DALI Dimmable	I x CCS-I 150-50FR-20/220-240 I x CCD-I 150-50FR-20/220-240
Electrical Connection	3P/5P push-in terminal block	BJB
Lamp-holder	G5 cap	BJB
Protection Class	I	
Ingress Protection	IP20	
Impact Resistance	IK07	
Light Output Ratio	LOR: 0.85(ULOR: 0%, DLOR: 85%)	
Unified Glare Ratio	UGR: <22	

MOUNTING INSTRUCTIONS

Recessed, surfaced or suspended with sleek gripple-type wire.
 Supplied with protective film which can be easily removed during installation on-site
 Main electrical power should be turned off when connecting the luminaires

DRAWING


ITEMS	DESCRIPTION
Dimensions	C1484xB58xA72 mm
Weight	3Kg
Operating Temperature	-20 °C ~ 40 °C



OPTICAL & ELECTRICAL CHATRACTERISTIC

ITEM	VALUES	REFERENCE
Lamp Power	1x28W / 1x40W	UG5-1500series / UG7-1500 series
System Power	31W / 44.5W	
Lamp efficacy	155lm/W	UG7 4000K / CRI82
Lamp Luminous Flux	6150lm	UG7 4000K / CRI82
System Luminous Flux	5220lm	UG7 4000K / CRI82
System efficacy	117lm/W	UG7 4000K / CRI82

PHOTOMETRIC DATA

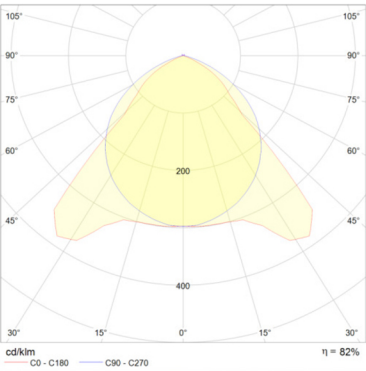

CIE FLUX: 58 91 99 99 82 (Reflector type)

ORDERING REFERENCES

EFO 4AS 3A 001-1	=> 1 Led Tube T5 - 150 cm	Light line Suspended/Recessed linear 1.5M aluminum matt reflector Push-in terminal block STUCCHI
EFO 4AS 3A 001-2	=> 1 Led Tube T5 - 150 cm	Light line Suspended/Recessed linear 1.5M aluminum matt reflector Push-in terminal block STUCCHI DALI
EFO 4ASD 3A 001-1	=> 1 Led Tube T5 - 150 cm	Light line Suspended/Recessed linear 1.5M Opal diffuser Push-in terminal block STUCCHI
EFO 4ASD 3A 001-2	=> 1 Led Tube T5 - 150 cm	Light line Suspended/Recessed linear 1.5M Opal diffuser Push-in terminal block STUCCHI DALI
EFO 4AS 4A 001-1	=> 1 Led Tube T5 - 180 cm	Light line Suspended/Recessed linear 1.8M aluminum matt reflector Push-in terminal block STUCCHI
EFO 4AS 4A 001-2	=> 1 Led Tube T5 - 180 cm	Light line Suspended/Recessed linear 1.8M aluminum matt reflector Push-in terminal block STUCCHI DALI
EFO 4ASD 4A 001-1	=> 1 Led Tube T5 - 180 cm	Light line Suspended/Recessed linear 1.8M Opal diffuser Push-in terminal block STUCCHI
EFO 4ASD 4A 001-2	=> 1 Led Tube T5 - 180 cm	Light line Suspended/Recessed linear 1.8M Opal diffuser Push-in terminal block STUCCHI DALI

LAMP



DESCRIPTION

EFO LEDT5 is not a retrofit lamp but an innovative exchangeable digital lamp delivering excellent energy efficiency and light flux with the highest durability. The frosted glass has a unique matt surface ensuring minimal glare and a pleasing aspect. Glass provides superior protection against ingress of corrosive gas and vapours that may cause premature aging or fatal destruction of the LED semiconductor's devices and other electronic components. Glass is also a very stable and durable material showing no discoloration and no mechanical deformation over time. **EFO LEDT5** lamps adopt the global G5 standard for connectivity.

PART NUMBER	DESCRIPTION	NUMBER OF LAMPS
UG5-I500 series	Standard white 28W, 3000K/3500K/4000K/5000K, CRI83	1
UG7-I500 series	Standard white 40W, 3000K/3500K/4000K/5000K, CRI83	1
UGT-I500 series	Tunable white, 28W, 3000K~5000K, CRI83	1
UGR-I500 series	Ultra CRI white, 33W, 3000K/4000K/5000K, CRI98	1

Lamps are supplied separately and should be installed on-site. However lamps can be pre-fitted at factory as option. Please contact your customer service for quotation.